



MACCIMEX®

ATC Aero ventiladores tubo axiales Jet Fan con silenciadores acústicos en 16", 18" y 20" de diámetro

La línea de los Aero Ventiladores Tubulares Jet Fan marca ATC en acoplamiento directo con silenciador y hélice en ángulo variable, ha sido específicamente diseñada para una operación silenciosa y desplazamiento de aire en áreas cerradas o subterráneas, como estacionamientos, túneles y minas, evitando acumulación de monóxido de carbono y gases en concentraciones peligrosas.

Características principales

- Conjunto carcasa tubular con bridas y silenciadores acústicos fabricados en acero al carbón con acabado en pintura poliéster en polvo horneada.
- Hélices de aluminio inyectado de 7 álabes en ángulo variable, balanceadas dinámicamente, anti-chispa, altamente resistentes a la corrosión.
- Silenciadores acústicos desmontables en la succión y descarga con medio de disipación en lana mineral con un mínimo de resistencia al flujo y un excelente coeficiente de absorción acústica.
- Rejillas de protección en succión y descarga, fabricadas en acero al carbón con acabado en pintura electrostática poliéster en polvo horneada.
- Accionado por acoplamiento directo a los motores eléctricos trifásicos de eficiencia premium en 4 y 6 polos, diseñados bajo las especificaciones NEMA.

Nomenclatura:

JF 4 - 16 / 35°

1 2 3 4

1. Modelo del ventilador.
2. No. de polos del motor.
3. Diámetro de la hélice en pulgadas.
4. Grado de inclinación de los álabes.

ATC direct drive tube axial Jet Fans with acoustic silencers in 16", 18" and 20" diameters

The ATC Jet Fan series are heavy duty tube axial air circulator fans with silencers and variable pitch angle blades designed for quiet operation and air movements in undergrounds, parking lots, tunnels, mining industries, avoiding the accumulation of carbon monoxide and gases in high level dangerous concentration.

Construction features

- Tubular housing, flanges, drive stands, acoustic silencers with inlet and outlet cones and all other structural supports are made of steel construction with a corrosion resistant electrostatically applied polyester powder coating finish.
- The non-spark die cast aluminum fan blades in variable pitch angles and 7 blade presentations are used for all ATC Jet Fan series.
- Galvanized welded inlet and outlet wire guards are standard on all Jet Fans models.
- Easy removable inlet and outlet acoustic silencers designed with a mineral wool media with a minimum airflow resistance and excellent acoustic absorption.
- Designed with high efficiency three phase premium motors in 4 and 6 poles for direct drive applications.

Nomenclature:

JF 4 - 16 / 35°

1 2 3 4

1. Fan Model.
2. No. of motor poles.
3. Fan blade diameter in inches.
4. Pitch degree angle

Especificaciones técnicas (Performance data)

Modelo (Model)	Caudal (Air Flow) @0°C.A.		Velocidad de Aire (Air Velocity)		Fuerza Axial (Axial Force)		Amperaje (Current) A				Potencia (Power)	RPM	Nivel sonoro (Sound pressure level)	Peso aproximado (Estimated Weight)		
	CFM	M3/HR	M/S	FT/S	N	Lbf	3F (3 phase)		1F (1 phase)					dB(A)	LB	KG
							230 V	460 V	220 V	127 V						
JF-4-16/35º	3250	5522	11.8	38.8	10.3	2.3	3.0	1.5	4.0	8.5	3/4	1750	75	187	85	
JF-6-16/35º	2140	3636	7.8	25.5	4.4	1.0	1.8	0.9	-	-	1/4	1150	65	187	85	
JF-4-18/35º	4830	8206	13.9	45.5	18.2	4.1	4.2	2.1	6.8	15.0	1	1750	78	211	96	
JF-6-18/35º	3170	5386	9.1	29.9	8.0	1.8	2.4	1.2	-	-	1/2	1150	69	211	96	
JF-4-20/35º	6650	11298	15.5	50.8	28.0	6.3	5.2	2.6	10.6	21.3	1 1/2	1750	82	260	118	
JF-6-20/35º	4370	7425	10.2	33.4	12.0	2.7	2.4	1.2	-	-	1/2	1150	73	255	116	




MACCIMEX®




JF

Curvas de operación/Operation curves


JF-4-16/35°

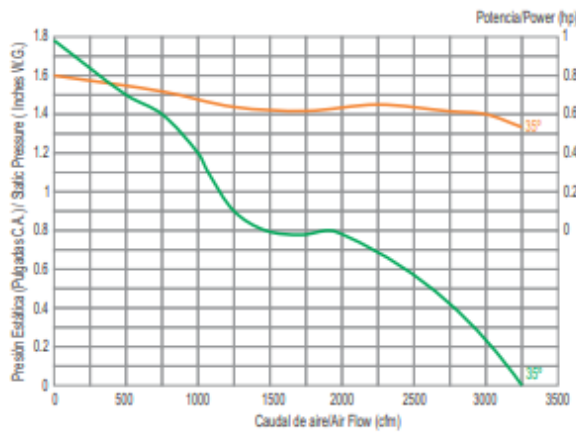


JF-6-16/35°

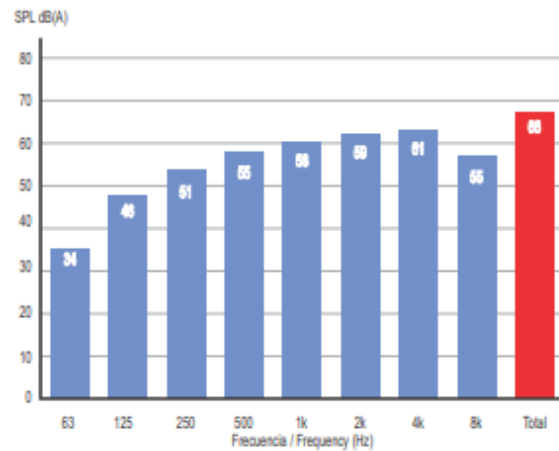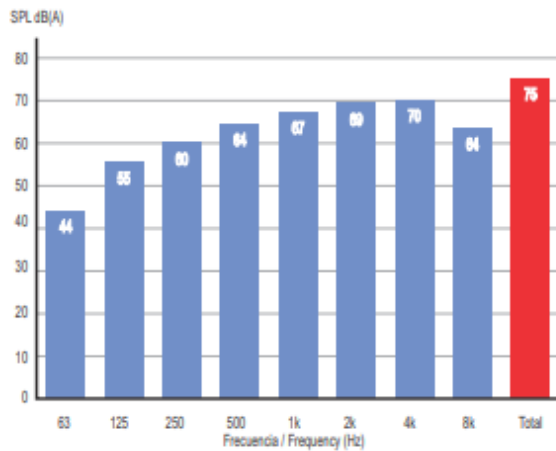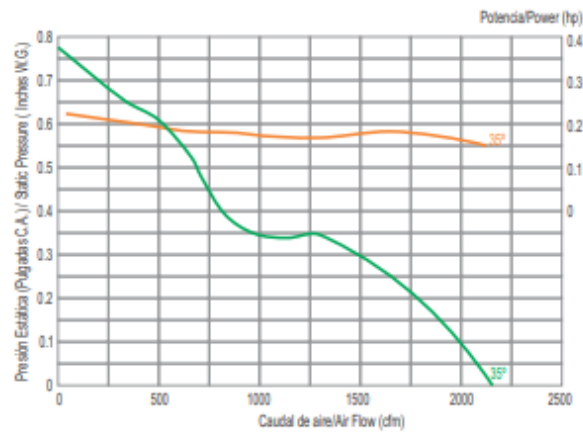

Hz Diagrama Campbell/Campbell Diagram

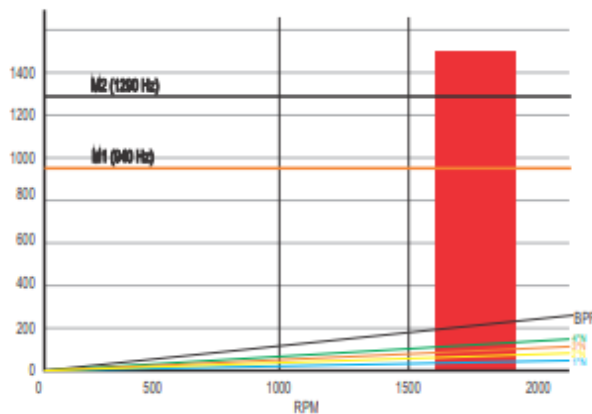

Hz Diagrama Campbell/Campbell Diagram

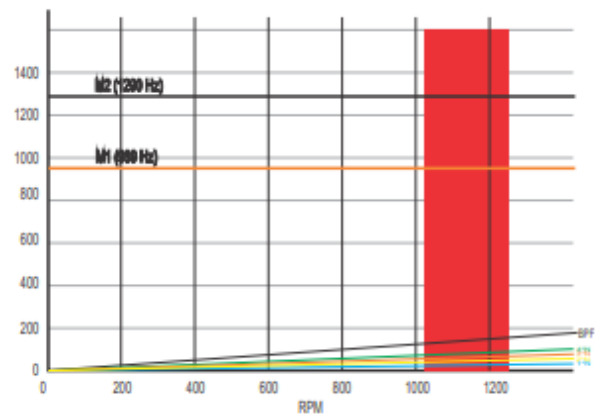




MACCIMEX®




JF

Curvas de operación/Operation curves


JF-4-18/35°

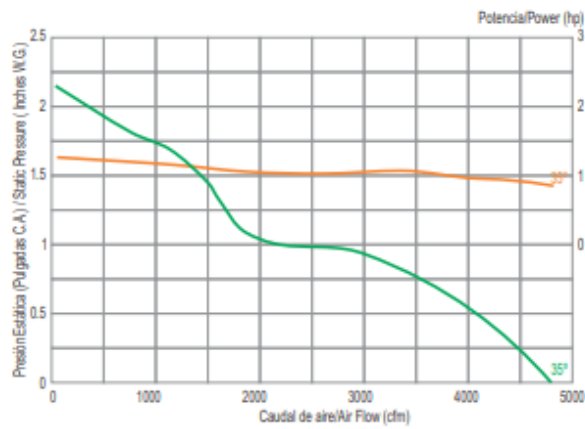


JF-6-18/35°

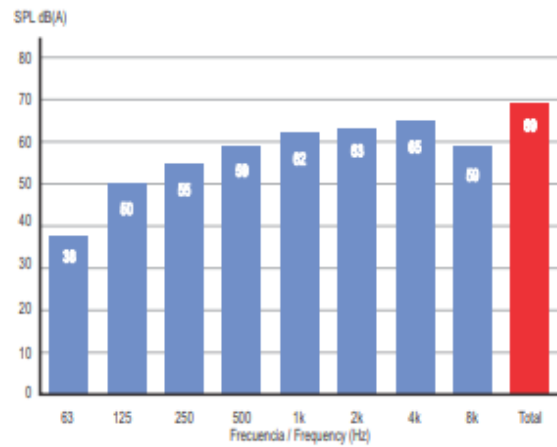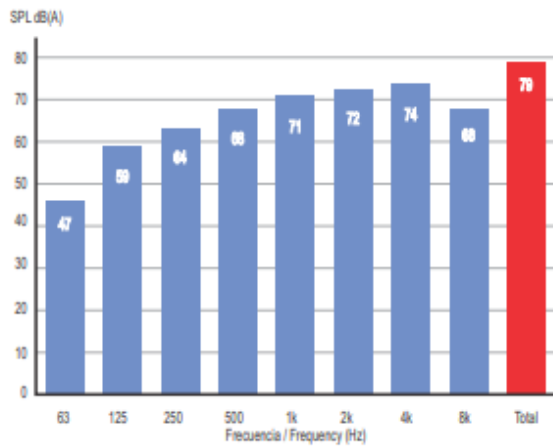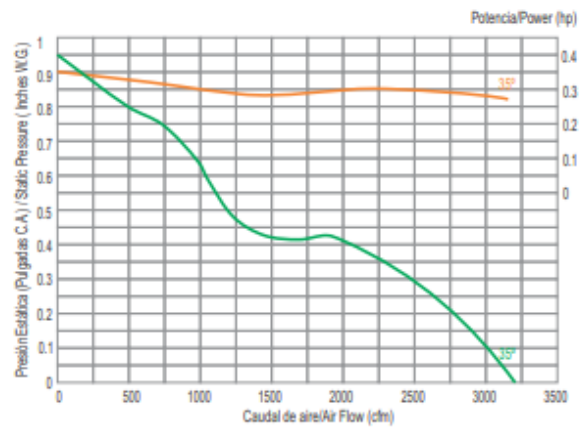

Hz Diagrama Campbell/Campbell Diagram

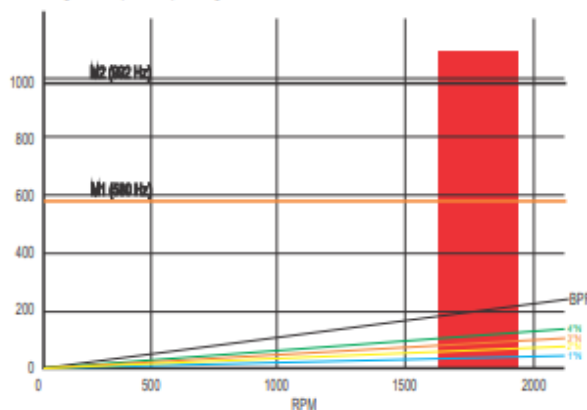


Hz Diagrama Campbell/Campbell Diagram

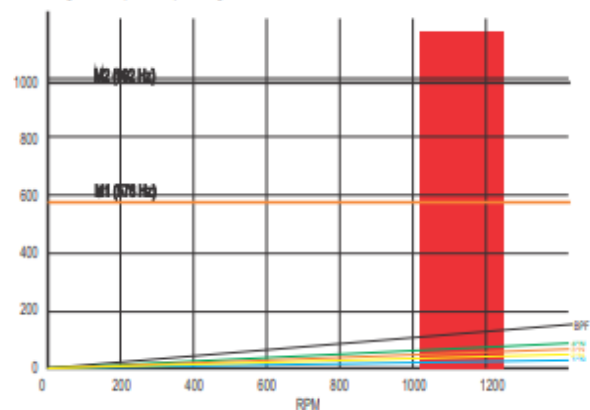



MACCIMEX®

Dimensiones generales/Dimensions

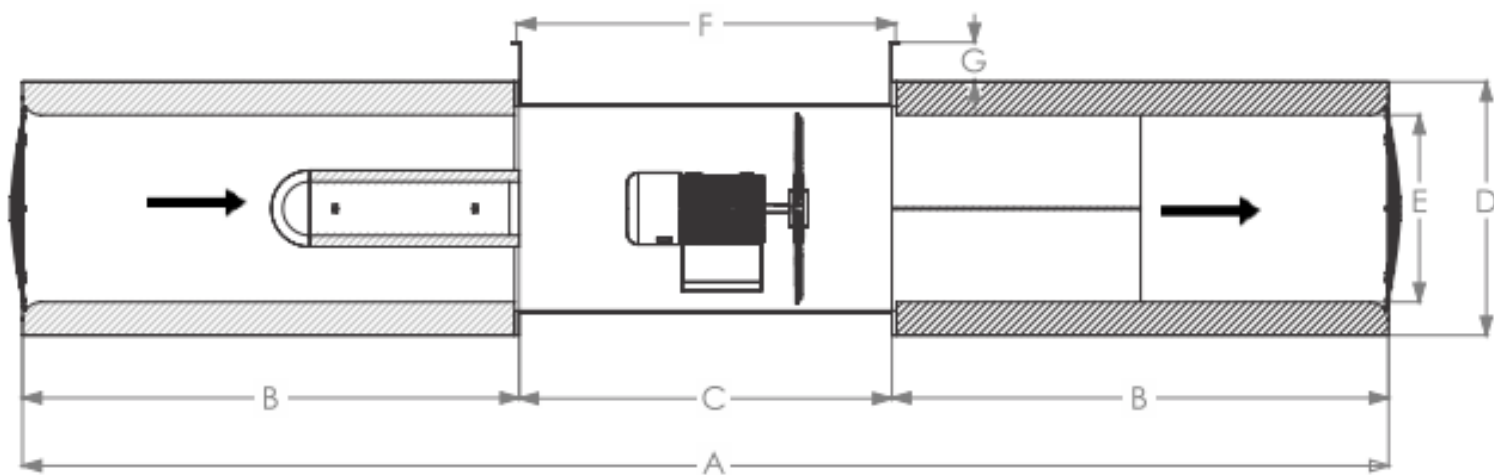

Modelo (Model)	Dimensiones generales (Dimensions) Pulgadas (Inches)								
	A	B	C	D	E	F	G	H	I
JF-16	70"	25 1/2"	19"	23"	17"	20 3/4"	1 1/4"	24 1/4"	16 1/2"
JF-18	79"	28 1/2"	22"	25"	19"	23 3/4"	2 1/4"	26 3/4"	17 3/4"
JF-20	89"	31 1/2"	26"	27"	21"	27 7/8"	3 3/8"	29 3/8"	20"

